


/ ВТД-Е900

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	

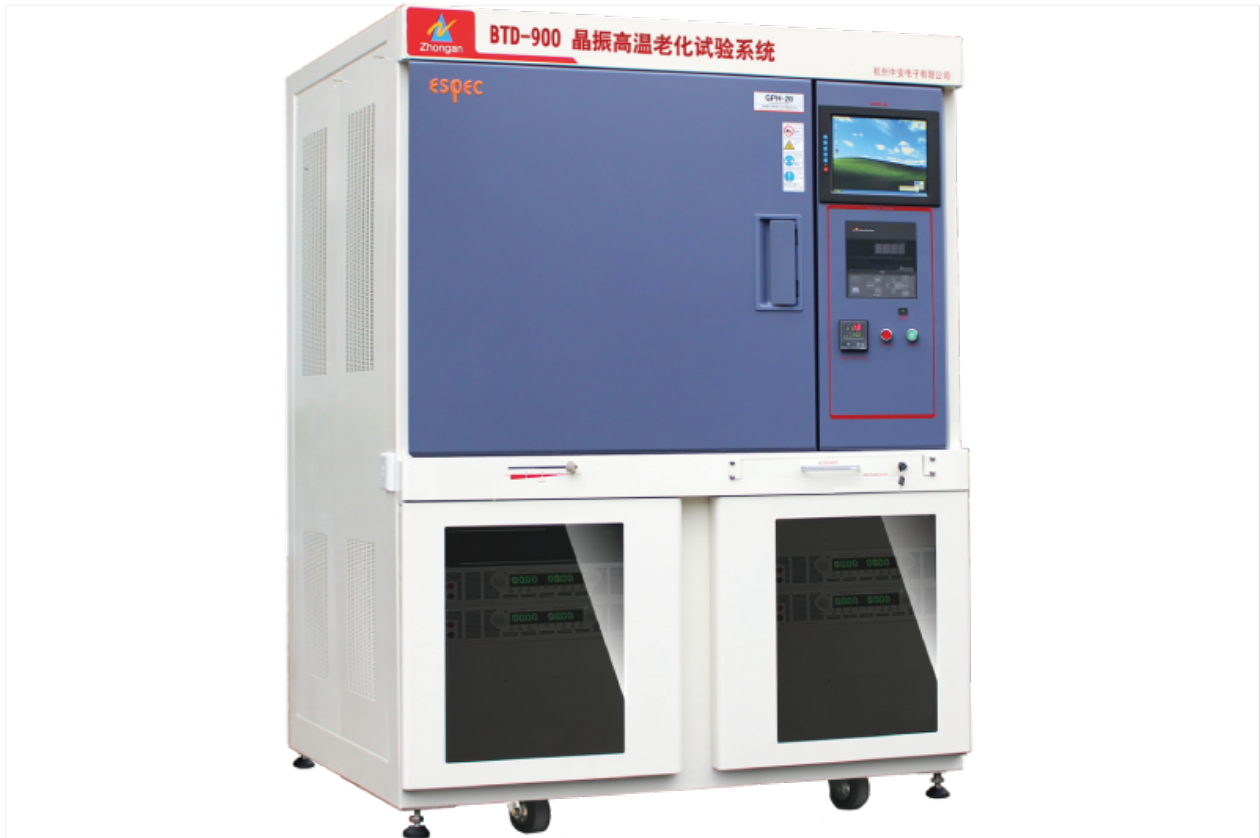

BTD-E900(Crystal oscillator)

Crystall Oscillator High Temp. Burn-in System

The system can perform high temp.dynamic burn-in screening and life test for Quartz crystal oscillator(< 200Mhz)in various packages.

1 slot: 1 drive board configuration; total 8pcs; Each board is configured with 2 sets of DC/DC converter and 40 channels of high speed D-signal, which helps DUT's vibration frequency transmit to the frequency meter for high-speed frequency test, and DUT frequency is real-time detected circularly

Test Standard



GJB548A



GJB597



MIL-STD-883D



MIL-M-38510

Chamber

Brand	GWS/ESPEC PH-201
Dimension	600*600*600(mm)

**Air
circulating**

Horizontal air circulating design

Temperature

Ambient~150°C

**Temp.
uniformity**

125°C±3°C(null load); Fluctuation:±0.5°C

Capacity

Zone QTY.

4

Slot

16

**DUT per slot/
Total**

40/640 (DUT QTY.related to package; Larger package,
less DUT per board)

Bulk Power Supply

QTY.

4 sets(standard configuration)

Output

20.0V/60.0A

DC/DC Converter

Output

Vcc1 : 15.00V/10.0A ; Vcc2 : 15.00V/10.0A

Note

Each index test point of each DC/DC converter is the
power output terminal

Frequency generation

Type

Keysight-Frequency meter

Range

100Hz ~ 120MHz

Driver Board

QTY.	16pcs
Bulk PS voltage detection	Range : 0.0 ~ 99.9V ; Accuracy : $\pm(1\% + 1\text{LSB})$
Current detection	Range : 0.0 ~ 99.9A ; Accuracy : $\pm(1\% + 1\text{LSB})$
DC/DC converter voltage detection	Range : 0.00 ~ 10.00V ; Accuracy : $\pm(1\% + 1\text{LSB})$
Current detection	Range : 0.00 ~ 10.00V ; Accuracy : $\pm(1\% + 1\text{LSB})$
Frequency detection	Range : 100Hz ~ 120MHz;
Burn-in Board	
Substrate material	High Tg substrate
Temp. up to	150°C / 175°C / 200°C
Dimension	290*600(mm)
Equipment	
Dimension	1430W*1400D*2000H(mm)
Electrical requirement	A.C.220V \pm 10% / 50Hz
Power/Weight	8KW / 600KG

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	